

## 48V

EN  
A combination of linear structures.

Thanks to its multiple accessories, it allows us to combine technical and decorative lighting in the same space. Its minimalist aesthetics and small dimensions allow us to incorporate linear solutions in any kind of project.

ES  
48V Track es una combinación de estructuras lineales.

Gracias a sus múltiples accesorios nos permite combinar iluminación técnica y decorativa en un mismo espacio. Su estética minimalista y de dimensiones reducidas nos permite incorporar la solución lineal en cualquier espacio.

FR  
48V Track est une combinaison de structures linéaires.

Grâce à ses multiples accessoires, il nous permet de combiner l'éclairage technique et décoratif dans un même espace. Son esthétique minimaliste et ses petites dimensions nous permettent d'incorporer la solution linéaire dans tout espace.


IT  
48V è una combinazione di una struttura lineare.

Grazie ai suoi numerosi accessori ci permette unire l'illuminazione tecnica con quella decorativa. Un'estetica minimalista dalle dimensioni ridotte che permette incorporare una soluzione lineare in qualsiasi spazio.

# 48V H. Opal lienal direct


## Technical information / Información técnica:

Index Protection / Índice de protección:	IP20
Driver:	Included / Incluido
CRI:	90
Temperature / Temperatura:	2700K/3000K
Lifetime / Tiempo de vida:	50.000h
Technology / Tecnología:	LED
Guarantee / Garantía:	5 years / 5 años
Class / Clase	II
Voltage / Voltaje:	48V

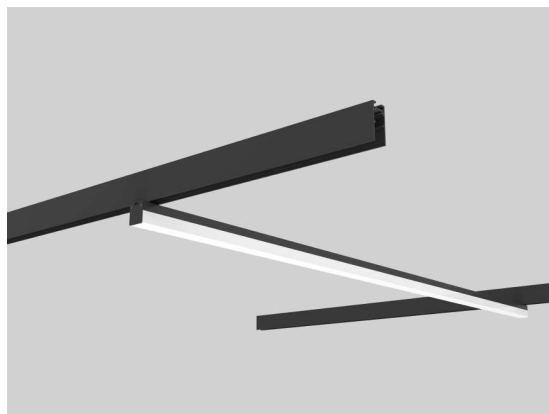

## Model:

	Colour	CRI/Temp.	Angle	Led	Dimming
25131E-	0 White	H 927	9 120°	1 1300 lm / 20W	On-Off
	1 Black	E 930			D Dali
		F 940			

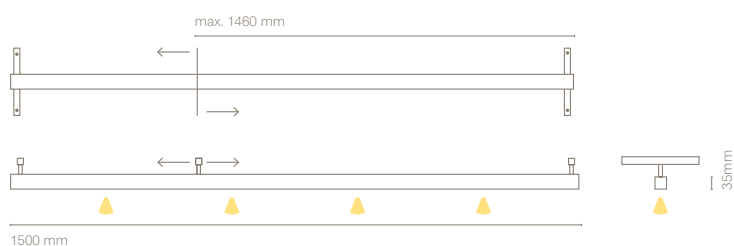

## Collection:



Suspended magnetic ball  
25211-

Magnetic dot lineal  
25121-

Zoom spotlight 7.7 W  
25011-



## Quality certificates:



# 48V


## Technical information / Información técnica:

Dimming / Regulación: Dali  
 Voltage / Voltaje: 48V

### Model:


Surface mounted  
 magnetic track

		Colour
25901E-	48V Track Surface Mounted / 15A / 100cm	0 White
25902E-	48V Track Surface Mounted / 15A / 200cm	1 Black
25903E-	48V Track Surface Mounted / 15A / 300cm	
25969-	Rigid Suspension Kit	
25953-	"L" connector not electrified	
25967-	Quick-Fixing Clip	
25955-	End cap with hole	
25956-	End cap without hole	
25951-	Suspension Kit (1,50m -1 uds)	
25952-	Mechanical lineal joint	
25957E-	Power supply (End Feed)	
25958E-	Electrified lineal joint	
25959E-	Electrified "L" joint	
25960E-	Electrified flexible joint	

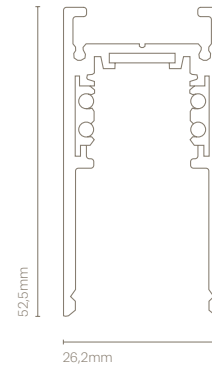

Trimless embedded  
 magnetic track

		Colour
25911E-	48V Track Embedded / 15A / 100cm	1 Black
25912E-	48V Track Embedded / 15A / 200cm	
25913E-	48V Track Embedded / 15A / 300cm	
25954-	Mechanical lineal joint	
25963-	Ceiling fixing support	
25964-	Quick-Fixing Clip for M6 tensor	

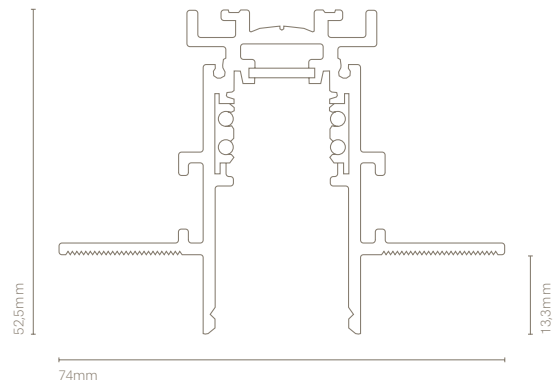

## Accessories / Accesorios:

25955-	End cap with hole
25956-	End cap without hole
25957-	Power supply
25958-	Electrified lineal joint
25959-	Electrified "L" joint
25960-	Electrified flexible joint
25961-	Electrical contact cutting tool
25962-	Bluetooth (Casambi) adapter

## 48V Converters

25990-	Converter 110-240V	75W	48V	IP00
25991-	Converter 110-240V	150W	48V	IP00
25992-	Converter 220-240V	100W	48V	IP20
25993-	Converter 220-240V	250W	48V	IP20
25994-	Converter 110-277V	240W	48V	IP67
25995-	Converter 110-277V	320W	48V	IP67
25999-	Optocoupler for Dali *			

\* Required for Dali signal on track systems.

Quality certificates:

