



SAGRADA FAMILIA

EN

LED strip with direct 230V power supply. It offers easy installation and excellent versatility. It is capable of reaching a length of 100 metres without experiencing a drop in light intensity, making it an ideal choice for large-scale projects.

ES

Tira LED de alimentación directa a 230V. Ofrece una fácil instalación y una excelente versatilidad. Es capaz de alcanzar una longitud de 100 metros sin experimentar caídas en la intensidad lumínica, lo que la convierte en una opción ideal para proyectos de gran envergadura.

FR

Bande LED avec alimentation directe en 230V. Elle offre une grande facilité d'installation et une excellente polyvalence. Elle est capable d'atteindre une longueur de 100 mètres sans perte d'intensité lumineuse, ce qui en fait un choix idéal pour les projets de grande envergure.

IT


Striscia LED con alimentazione diretta a 230V. Offre facilità di installazione ed eccellente versatilità. È in grado di raggiungere una lunghezza di 100 metri senza subire cali di intensità luminosa, il che la rende una scelta ideale per progetti di grandi dimensioni.

Sagrada familia

LED strip with direct 230V power suitable.

Technical information / Información técnica:

Index Protection / Índice de protección:	IP65*
Driver:	Not Included / No Incluido
CRI:	>80
Temperature / Temperatura:	2700K / 3000K / 4000K
Lifetime / Tiempo de vida:	40.000h L80B20
Technology / Tecnología:	LED
Guarantee / Garantía:	4 years / 4 años
Voltage / Voltaje:	230V
Efficiency / Eficiencia:	Up to 93lm/W
Led type / Tipo de led:	2835
McAdam Step:	<3 SDCM
Max. Length:	100m
PCB Thickness:	2 oz
Dimming / Regulación:	Edge cut**

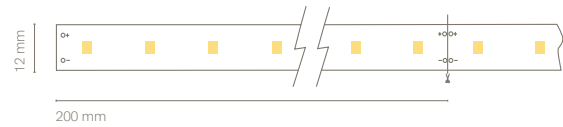

* IP65 protection due to electrical safety. It is not recommended to install where it can receive water if it is accessible.

**Trailing-edge recommended

Recommended length (max.) 100 m
 Profile Recommended
 Dimension 12X4mm
 Cut 200 mm / 12 LED

Model:

	Temperature	Density	Lumen output	Power
21411-G/m	2700K	60 leds/m	635 lm/m	7 W/m
21411-C/m	3000K	60 leds/m	665 lm/m	7 W/m
21411-N/m	4000K	60 leds/m	700 lm/m	7 W/m

Cuts by meter

	Temperature	Density	Lumen output	Power
21411-G	2700K	60 leds/m	635 lm/m	7 W/m
21411-C	3000K	60 leds/m	665 lm/m	7 W/m
21411-N	4000K	60 leds/m	700 lm/m	7 W/m

10m reel

	Temperature	Density	Lumen output	Power
21411-G/100	2700K	60 leds/m	635 lm/m	7 W/m
21411-C/100	3000K	60 leds/m	665 lm/m	7 W/m
21411-N/100	4000K	60 leds/m	700 lm/m	7 W/m

100m reel

Accessories:

21490-	Male - Female Kit For Welding IP65
21491-	Screw Alimentation Kit IP65 Max. 460W

Quality certificates:

